

Box Camera


NBCT - iLQ338IH(DV) - L0 iSQ338IH(DV) - L0



Feature

1. Color Camera PCB Module with SONY 1/3" High Res. CCD Sensor.
2. Employs Digital Signal Processor (DSP) IC for image control.
3. High sensitivity, low smear, high anti-blooming, high S/N ratio.
4. Supports functions: Auto Electronic Shuttler (AES), Auto Gain Control (AGC), Auto White Balance (AWB), Back Light Compensation (BLC), Flicker Less (FL), Mirror function.
5. NBCT - iLQ338IH belong to Starlight Camera.
6. Build-in **iDNR** Engine:
 - (1) Noise Reduction.
 - (2) Intelligent Auto-adjust Video Brightness.

Rear View

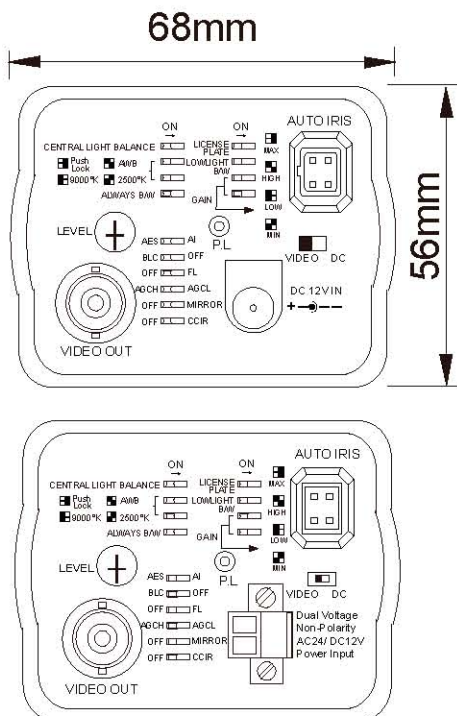

Specification

Model	NBCT - iLQ338IH(DV) - L0 iSQ338IH(DV)
Image Pick-up Device	SONY 1/3" CCD
Effective Picture Elements	NTSC:768*494 ; PAL:752*582(H*V)
Horizontal Resolution	520 TV lines
Minimum Illumination	0.05 LUX @ F1.2
S/N Ratio	More than 52dB
Auto Electronic Shutter	NTSC: 1/60s~1/100,000s ; PAL: 1/50s~1/110,000s
Auto Gain Control	Automatically
Auto White Balance	Color Temperature: 2500°K~9500°K
Gama Characteristic	0.45
Synchronous System	Internal, Negative sync
Video Output	1 Vp-p Composite Video / 75 Ω
Power Supply	12V DC±1V (DV: AC24 / 12V DC±1V)
Power Consumption	140mA
Lens Furnished	Optional for CS Mount Lens
Operating Temperature	-10°C to 50°C (14°F to 122°F)

TEL: (852)2782 7522

www.profitoa.com.hk

Packing List

NO.	Description	Component NO.	Q`TY
1.	Box Camera	NBCT - iLQ338IH(DV) - L0 iSQ338IH(DV) - L0	1
2.	Screw & Anchor	Screw - Ancor	3
3.	Manual	NBCT - Manual	1
4.	Wrench	Wrench	1

Dimension(unit:mm)

