

60 IR Leds Weatherproof / External Adjustment Lens Zoom & Focus Camera


NVFIR60 - BN332M / BN332H - iSQ332H / iLQ332H - LBMI3712
iSQ338IH / iLQ338IH




Feature

1. Color Camera PCB Module with SONY 1/3" SuperHAD CCD Sensor & SHARP 1/3" High Res. CCD Sensor.
2. Employs Digital Signal Processor (DSP) IC for image control.
3. High sensitivity, low smear, high anti-blooming, high S/N ratio.
4. Supports functions: Auto Electronic Shuttler (AES), Auto Gain Control (AGC), Auto White Balance (AWB), Back Light Compensation (BLC), Flicker Less (FL), Mirror function.
5. NVFIR60 - iLQ332H / iLQ338IH with SONY 2nd generation Low Lux CCD Sensor.
6. NVFIR60 - iSQ332H & iLQ332H & iSQ338IH & iLQ338IH Build-in **iDNR** Engine:
 - (1) Noise Reduction.
 - (2) Intelligent Auto-adjust Video Brightness.
 - (3) Intelligent Drive IR LED Light Mount According Video Brightness.
 - (4) Discontinuous IR LED Heat Accumulation.

Front View

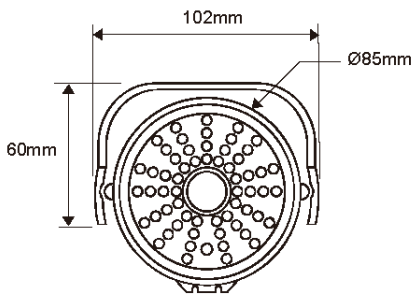

Rear View



Specification

Model	NVFIR60 - BN332M	NVFIR60 - BN332H	NVFIR60 - iSQ332H iLQ332H iSQ338IH iLQ338IH
Image Pick-up Device	SHARP 1/3" CCD SONY 1/3" CCD	SONY 1/3" CCD SHARP 1/3" CCD	SONY 1/3" CCD
Effective Picture Elements	NTSC:510*492 PAL:500*582(H*V)	NTSC:768*494 PAL:752*582(H*V)	NTSC:768*494 PAL:752*582(H*V)
Horizontal Resolution	420 TV lines	480 TV lines	520 TV lines
Minimum Illumination	0.1 LUX @ F2.0	0.5 LUX @ F2.0	0.5 LUX @ F2.0
S/N Ratio	More than 48dB	More than 48dB	More than 52dB
Auto Electronic Shutter	NTSC: 1/60s~1/100,000s ; PAL: 1/50s~1/110,000s		
Auto Gain Control	Automatically		
Auto White Balance	Color Temperature: 2500°K~9500°K		
Gama Characteristic	0.45		
Synchronous System	Internal, Negative sync		
Video Output	1 Vp-p Composite Video / 75 Ω		
Power Supply	12V DC±1V		
Power Consumption	900mA IR ON		920mA IR ON
Lens Furnished	3.7 - 12mm / F 1.4 Manual IRIS Lens		
Operating Temperature	-10°C to 50°C (14°F to 122°F)		

Packing List

TEL: (852)2782 7522
www.profitoa.com.hk

NO.	Description	Component NO.	Q'TY
1.	60 IR Leds Weatherproof / External Adjustment Lens Zoom & Focus Camera	NVFIR60 - BN332M / BN332H iSQ332H / iLQ332H - LBMI3712 iSQ338IH / iLQ338IH	1
2.	Screw & Anchor	Screw - Ancor	4
3.	Manual	NVFIR60 - Manual	1
4.	Position Sticker	NVFIR60 - PS	1
5.	Bracket	NVFIR60 - A165	1
6.	Screw + Mat	Screw + Mat	1

Dimension(unit:mm)

